

# CRYSTAL SILICONE SEALANT

TECHNICAL DATA SHEET  
Version 6.0 – Revised 2025



## Product Description

**Professional Crystal Clear Silicone Sealant** specially formulated for areas requiring an aesthetically pleasing clear seal such as around glass and display cases with an excellent adhesion on glass and glazed surfaces.

## Approvals




## Features

- Crystal Clear Silicone
- Weather Resistant
- Aging Resistant
- UV Resistant
- Good Adhesion On Glass And Glazed Surfaces



**WEATHER  
RESISTANT**



**UV  
RESISTANT**



**AGEING  
RESISTANT**




**SUPERIOR  
ADHESION**


# CRYSTAL SILICONE SEALANT

TECHNICAL DATA SHEET  
Version 6.0 – Revised 2025

## Packaging

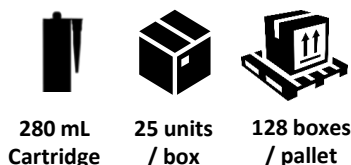

## Shelf Life



## Standard Colors




## Technical Data

Property	Unit	Value
Chemical Base		Acetoxys
Tack free time	Min	9 – 11
Density	g/mL	0.97 ± 0.01
Shore A Hardness		15 ± 2
Tensile Strength	MPa	1.70
Elongation at Break	%	700
Application Temperature	°C	+5 to +40
Temperature Resistance	°C	-40 to +120

## Instructions

This product is ready to use. After proper surface preparation and masking, apply the sealant using a standard caulking gun. Tool the sealant within 5 minutes of application using a spatula or finishing tool dipped in soapy water. Remove the masking tape immediately after tooling. Uncured sealant can be cleaned with an appropriate sealant remover.



## Surface Preparation

All surfaces must be clean, dry, and free from dust, grease, oil, or frost. In renovation or repair applications, remove any old sealant, loose material, and flaking paint completely to ensure proper adhesion.

## Priming

This product features adhesion to a variety of non-porous substrates; however, for specific substrates, priming may be necessary to improve adhesion. Please consult our Technical Service Department.

The information in this document is based on Saber Industrial's technical and practical experience. It is provided for reference only and may not include all relevant details. Users must test product suitability for their intended application, surface, and conditions. Saber Industrial accepts no liability for misuse, improper application, storage, or transport. We reserve the right to change formulations without notice. Warranty is limited to conformance with current sales specifications. Liability is restricted to refund or replacement of non-conforming product.