


PVC ELECTRICAL INSULATING TAPE

TECHNICAL DATA SHEET
Version 2.0 – Revised 2025

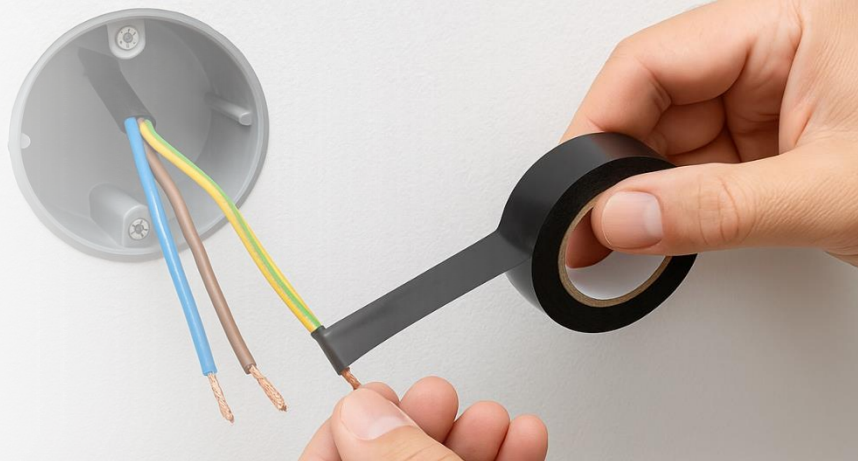

Product Description

Premium quality PVC insulating tape with excellent adhesion, and high water/solvent resistance providing great electrical insulation for all wire and cable splices. Clean, residue free removal. Highly stretchable and conformable. High dielectric strength and good mechanical protection. Available in a wide range of colors for easy identification.

Approvals



Features

- Excellent Adhesion
- High Water/Solvent Resistance
- High Insulation
- Clean, Residue Free Removal
- Highly Stretchable/Conformable
- High Dielectric Strength
- Good Mechanical Protection
- Indoor/Outdoor Application



TEMPERATURE
RESISTANT



GREAT
INSULATION




WATER
RESISTANT




RESIDUE
FREE

PVC ELECTRICAL
INSULATING
TAPE


TECHNICAL DATA SHEET
Version 2.0 – Revised 2025

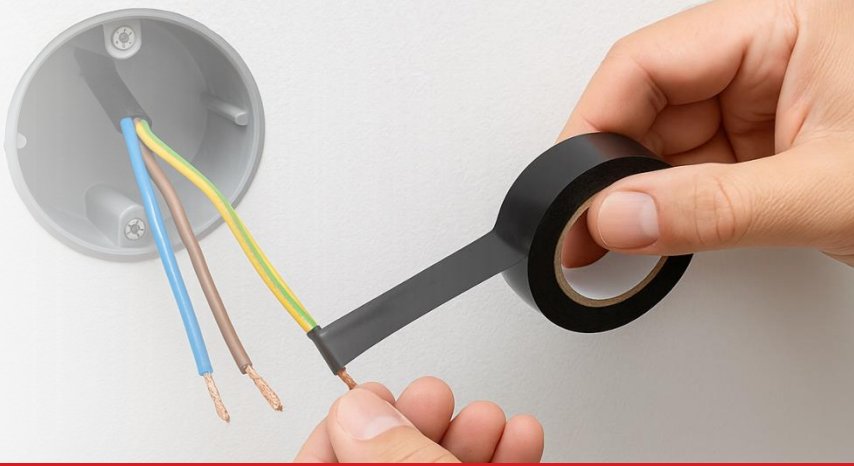


Packaging



20
Yards



100 units
/ box




100 boxes
/ pallet


Technical Data

| Property | Unit | Value |
|-----------------------------|------------|----------|
| Backing | | PVC Film |
| Total Thickness | mm | 0.13 |
| Elongation | % | 140 |
| Tensile Strength | kg / 25 mm | 4 |
| Dielectric Strength | kV | 5 |
| Adhesion to Stainless Steel | Kg / 25 mm | 0.4 |
| Temperature Resistance | °C | 90 |

Shelf Life



24
Months



+ 27°C
+ 5°C

Proper
Storage

Instructions

Surfaces should be clean of dust, grease, oil or any other contaminants. To ensure optimal bonding, tape should be applied with sufficient tension and a minimum of two layers with a half overlap. The final layer should be wrapped with no tension to prevent flagging effects.

The information in this document is based on Saber Industrial's technical and practical experience. It is provided for reference only and may not include all relevant details. Users must test product suitability for their intended application, surface, and conditions. Saber Industrial accepts no liability for misuse, improper application, storage, or transport. We reserve the right to change formulations without notice. Warranty is limited to conformance with current sales specifications. Liability is restricted to refund or replacement of non-conforming product.

