

SANITARY BATH & KITCHEN SILICONE SEALANT



TECHNICAL DATA SHEET
Version 6.0 – Revised 2025

Product Description

Professional Anti-fungal Bath & Kitchen Silicone for use in sanitary sealing & adhesion. Excellent resistance to mildew, aging, shrinkage & cracking.

Approvals



Features

- Fungus and mildew resistant
- 100% silicone polymer
- Excellent elasticity
- Solvent-free
- Excellent resistance to shrinkage, cracking and discoloring
- Resistant to aging, ultra-violet radiation and temperature extremes



**WEATHER
RESISTANT**



**UV
RESISTANT**



**QUICK
TO DRY**



**SUPERIOR
ADHESION**





SANITARY BATH & KITCHEN SILICONE SEALANT




TECHNICAL DATA SHEET
Version 6.0 – Revised 2025



Packaging

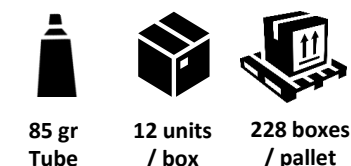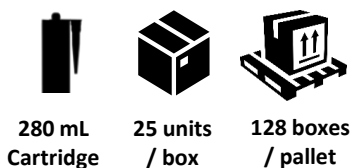

Shelf Life



Standard Colors




Technical Data

Property	Unit	Value
Chemical Base		Acetoxys
Tack free time	Min	12 - 18
Density	g/mL	0.98 ± 0.01
Shore A Hardness		13 ± 2
Tensile Strength	MPa	2.10
Elongation at Break	%	480
Application Temperature	°C	+5 to +40
Temperature Resistance	°C	-40 to +150

Instructions

This product is ready to use. After proper surface preparation and masking, apply the sealant using a standard caulking gun. Tool the sealant within 5 minutes of application using a spatula or finishing tool dipped in soapy water. Remove the masking tape immediately after tooling.



Surface Preparation

All surfaces must be clean, dry, and free from dust, grease, oil, or frost. In renovation or repair applications, remove any old sealant, loose material, and flaking paint completely to ensure proper adhesion.

Priming

This product features adhesion to a variety of non-porous substrates; however, for specific substrates, priming may be necessary to improve adhesion. Please consult our Technical Service Department.

The information in this document is based on Saber Industrial's technical and practical experience. It is provided for reference only and may not include all relevant details. Users must test product suitability for their intended application, surface, and conditions. Saber Industrial accepts no liability for misuse, improper application, storage, or transport. We reserve the right to change formulations without notice. Warranty is limited to conformance with current sales specifications. Liability is restricted to refund or replacement of non-conforming product.