

WEATHER RESISTANT TILES SEALANT

TECHNICAL DATA SHEET
Version 7.0 – Revised 2025



Product Description

Professional Weather Resistant Tile Sealant for Int./Ext. use in wall & floor covering, pool expansion joints. High elasticity and mildew resistance. Excellent adhesion on marble, granite & most building material.

Approvals



Features

- Excellent adhesion on marble, granite, quartz and most other types of building substrates (glass, ceramic, aluminum, concrete, stainless steel PVC etc)
- Exceptional UV resistance
- Excellent resistance to movement
- Anti-mold
- Ageing and moisture Resistance



**WEATHER
RESISTANT**



**UV
RESISTANT**



**QUICK
TO DRY**



**SUPERIOR
ADHESION**



**TILE COLOR
MATCHING**




WEATHER RESISTANT TILES SEALANT




TECHNICAL DATA SHEET
Version 7.0 – Revised 2025

Packaging

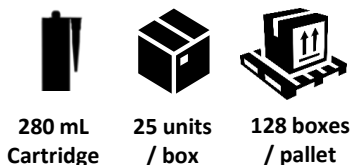

Shelf Life



Standard Colors




TILE COLOR
MATCHING

Technical Data

Property	Unit	Value
Chemical Base		Oxime
Tack free time	Min	6 – 12
Density	g/mL	1.02 ± 0.01
Shore A Hardness		25 ± 2
Tensile Strength	MPa	1.70
Elongation at Break	%	495
Application Temperature	°C	+5 to +40
Temperature Resistance	°C	-50 to +150

Instructions

This product is ready to use. After proper surface preparation and masking, apply the sealant using a standard caulking gun. Tool the sealant within 5 minutes of application using a spatula or finishing tool dipped in soapy water. Remove the masking tape immediately after tooling.



Surface Preparation

All surfaces must be clean, dry, and free from dust, grease, oil, or frost. In renovation or repair applications, remove any old sealant, loose material, and flaking paint completely to ensure proper adhesion.

Priming

This product features adhesion to a variety of non-porous substrates; however, for specific substrates, priming may be necessary to improve adhesion. Please consult our Technical Service Department.

The information in this document is based on Saber Industrial's technical and practical experience. It is provided for reference only and may not include all relevant details. Users must test product suitability for their intended application, surface, and conditions. Saber Industrial accepts no liability for misuse, improper application, storage, or transport. We reserve the right to change formulations without notice. Warranty is limited to conformance with current sales specifications. Liability is restricted to refund or replacement of non-conforming product.