




HIGH HEAT SPRAY PAINT

Dyna-Pro® High Heat Spray Paint can resist up to 700°C . It is formulated for use on woodstoves, grills, barbecues, stovetops, engines, radiators, etc... Also used to prevent corrosion and rust.



Features

- Resists up to 700°C
- Quick to dry
- Easy to apply
- Weather resistant
- High coverage
- Interior/Exterior application
- CFC free
- Superior adhesion

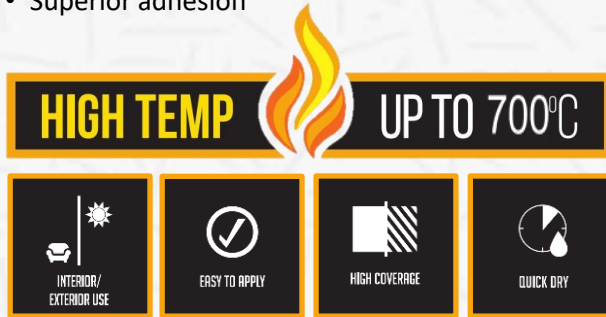

Application

Shake can vigorously for at least one minute after rattling of mixing ball is heard. While in use, shake intermittently to ensure color uniformity and to prevent clogging.

Hold the can approximately 30 cm from the object to be sprayed. Press spray button firmly while moving can back and forth. Finger must not protrude over front edge of spray button at any time.

Keep can in level line with surface and do not apply continuous spray.

For best results, apply 2 to 3 thin coats with intermittence of 10 minutes

Once applied, if product were to bubble, foam or run then you are too close to the surface or coat is too heavy.

After use, clear out the paint can's nozzle. To do so, hold the can upside down, depress the nozzle and keep spraying until only gas emerges.

Toss empty can in trash.

Do not puncture can or subject to high heat or flame.

Safety Precautions

Keep away from children

Keep upright

Can contents under pressure. Do not puncture or burn

Shelter from direct sunlight

Do not store at temperatures exceeding 50°C

Do not pierce or burn even when empty

Do not smoke during the spraying process

For safety reasons, please wear protective gloves as well as goggles before using Spray paint.

Shelf Life

36 months from date of production, when stored at or below 30°C in the original unopened container

Packaging

- 400 mL can

Standard Colors



Designed & Manufactured According to AFAQ
ISO 9001:2015 Certified Quality Management System

The information is offered in good faith and is believed to be accurate. It should not however be used in substitution for customer's tests to ensure that DYNA-PRO® products are safe, effective and compatible for the intended use. Sole warranty is that the product will meet the DYNA-PRO® sales specifications in effect at the time of delivery. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.